

# 4900 HI

## Sliding

Standard sliding system with hinged features. Offers great thermal and acoustic performance favoured by a glazing capacity of up to 36 mm and a thermal break zone of 34 mm. It has a interlock section of 35 mm and straight lines, allowing the sashes to cross over thanks to the integrated handle with multilock system.

Sliding  
Thermally broken



### Sightlines

Frame 60, 70, 89, 120, 125, 130 mm  
126, 145 mm 3 rails  
201 mm 4 rails  
Sash 48 mm

### Polyamide Strip Length

34 mm

### Profile Thickness

Window 1,6 mm

### Glazing

Max. 36 mm, Min. 24 mm

### Maximum Sash Dimensions

Width (L) 2200 mm, Height (H) 2600 mm

### Maximum Sash Weight


240 kg

Consult maximum weight and dimensions according to typologies

## POSSIBILITIES



ACCESSIBILITY

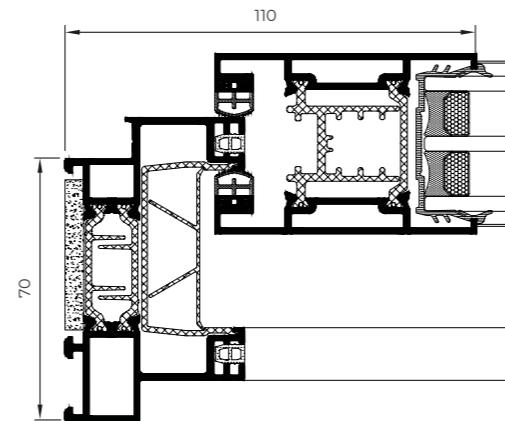

## OPENING POSSIBILITIES



Sliding  
1 rail (sash + fixed light)  
2 and 3 rails  
Pocket possibility

## FEATURES

Transmittance   $U_w \geq 1,2 (W/m^2K)$

Acoustic insulation   $R_w$  up to 40 dB

Air permeability  Class 4

Water tightness  Class 7A

Wind resistance  Class C5

Reference test 1,80 x 2,20 m / 2 sashes  
CSTB Laboratory DTA Certification



4900 HI SLIDING